

## Honeywell Vista 15SE

### Wiring Uplink's 5530M Cellular Communicators and Programming the Panel


**CAUTION:**

- It is advised that an experienced alarm installer programs the panel as further programming may be required to ensure proper performance and use of the full functionality.
- Do not route any wiring over circuit board.
- Full panel testing, and signal confirmation, must be completed by the installer.

**NEW FEATURE:** For 5530M Communicators, the status of the panel can be retrieved not only from the status PGM but now also from the Open/Close reports from the dialler.

**IMPORTANT NOTE:** The Open/Close reporting needs to be enabled during the initial pairing procedure.

### Wiring the 5530M communicators to Honeywell Vista 15SE

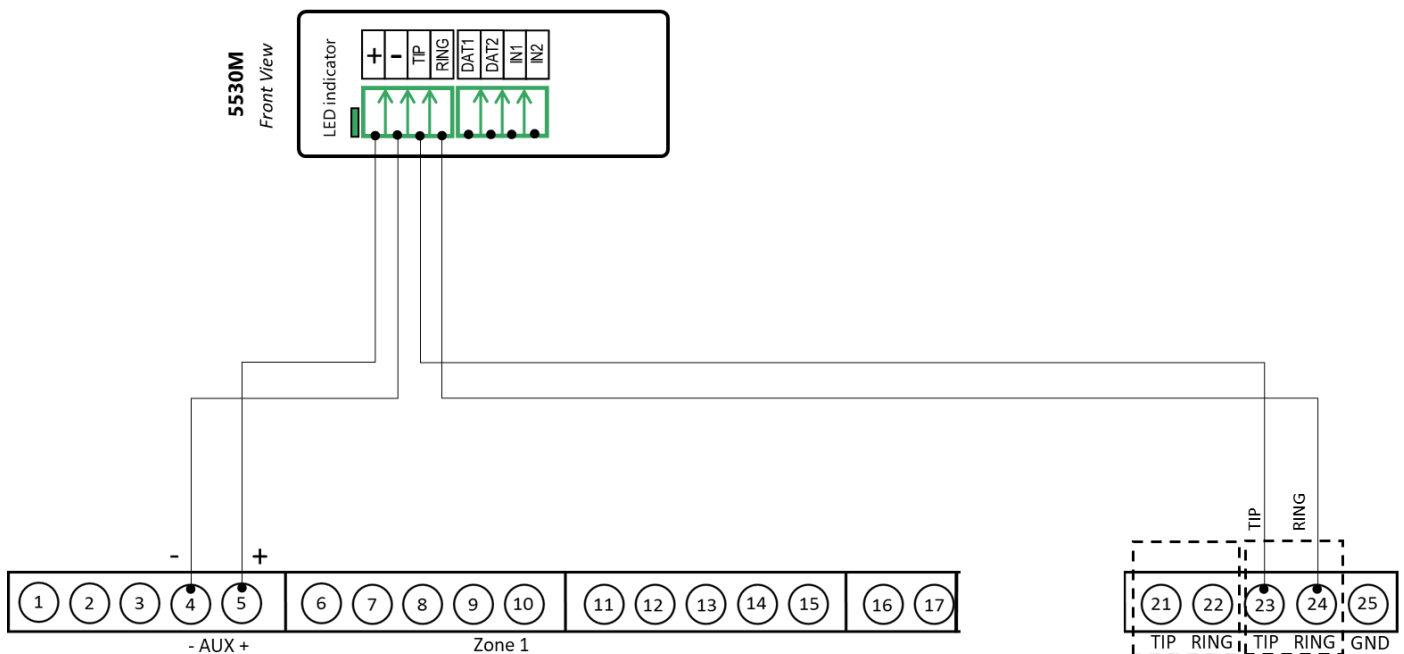

## Programming the Honeywell Vista 15SE Alarm Panel via the Keypad

Enable Contact ID reporting:

Keypad Display	Keypad Entry	Action Description
DISARMED	4112800	To enter programming menu.
Installer Code	*41	To start configuring primary phone number.
Pri. Phone	123456*	Enter phone number value and press * to save and go back.
Field?	*43	To start configuring "Part. 1 Primary Subs. Acct. No."
Pri Subld	1234*	Enter account number value and press * to save and go back.
Sec Subld	*45	To enter "Phone system select" menu.
Phone Sys	1*	To select "Tone Dial" and go back.
Field?	*46	To enter "Report format" menu.
Rep Form Pri/Sec	7*	To select "Ademco Contact ID" for primary phone number.
Field?	*65	To go to "Open report code" setup.
Open Rpt	1*	To enable reporting for "Open" event.
Field?	*66	To go to "Arm Away/Stay Report Code" menu.
Awy/Sty Rp	1, 1*	To enable reporting for "Away/Stay" events.
Field?	*92	To go to "TLM" menu.
Telco Monitor	0*	To disable TLM and save.
Field?	*99	To exit programming mode.